









■ Features

- Constant Voltage + Constant Current mode output
- Metal housing design with functional Ground
- · Built-in active PFC function
- No load / Standby power consumption < 0.5W
- · IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer; 3 in 1 dimming (dim-to-off); Smart timer dimming; DALI; Auxiliary DC output
- Typical lifetime>50000 hours
- 5 years warranty


Description

ELG-150-48 is a 150W AC/DC LED driver featuring the dual mode constant voltage and constant current output. ELG-150 operates from 100~305VAC. Thanks to the high efficiency up to 91%, with the fanless design, the entire series is able to operate for -40° C $\sim +90^{\circ}$ C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. ELG-150 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system

■ Applications

- · LED street lighting
- · LED architectural lighting
- · LED bay lighting
- LED floodlighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

■ Model Encoding

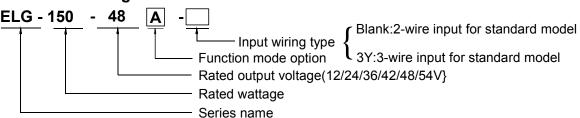

Туре	IP Level	Function	Note
Blank	IP67	lo and Vo fixed.	In Stock
Α	IP65	lo and Vo adjustable through built-in potentiometer.	In Stock
В	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
DA	IP67	DALI control technology.	In Stock
Dx	IP67	Built-in Smart timer dimming function by user request.	By request
D2	IP67	IP67 Built-in Smart timer dimming and programmable function.	
BE	IP67	IP67 3 in 1 dimming function and Auxiliary DC output	


SPECIFICATION

MODEL			ELG-150-48		
MODEL					
	DC VOLTAGE		48V		
		ENT REGION Note.2			
	RATED CURRE		3.13A		
	KATEDCURRE	NT (for BE Type only)			
			100VAC ~ 180VAC		
	RATED	(For All the Types)	105W		
	POWER		200VAC ~ 305VAC		
		(Except for BE Type)			
		(For BE Type only)	134.4W		
	RIPPLE & NOISE (max.) Note.3		250mVp-p		
	VOLTAGE ADJ. RANGE CURRENT ADJ. RANGE		Adjustable for A/AB-Type only (via the built-in potentiometer)		
OUTDUT			43.2 ~ 52.8V		
OUTPUT			Adjustable for A/AB-Type only (via the built-in potentiometer)		
			1.56 ~ 3.13A		
	VOLTAGE TOLERANCE Note.4		±2.0%		
	LINE REGULATION		±0.5%		
	LOAD REGULATION		±0.5%		
	AUXILIARY DC OUTPUT		Nominal 15V(deviation 11.5~15.5V)@0.3A for BE-Type only		
	SETUP, RISE TIME Note.6		1600ms, 80ms/115VAC 500ms, 100ms/230VAC		
	HOLD UP TIME (Typ.)		10ms/115VAC, 230VAC		
	VOLTAGE RANGE Note.5		100 ~ 305VAC 142 ~ 431VDC		
			(Please refer to "STATIC CHARACTERISTIC" section)		
	FREQUENCY RANGE		47 ~ 63Hz		
	DOWED FACTO	ND.	$PF \ge 0.97/115VAC$, $PF \ge 0.95/230VAC$, $PF \ge 0.92/277VAC@full load$		
	POWER FACTOR		(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)		
	TOTAL HADMONIO PICTORIO		THD< 20%(@load≥50%/115VC; @load≥60%/230VAC; @load≥75%/277VAC)		
	TOTAL HARMONIC DISTORTION		(Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)		
INPUT	EFFICIENCY (Typ.)		90%		
	EFFICIENCY (Typ.)(for BE Type only)		88%		
	AC CURRENT		1.7A / 115VAC 0.9A / 230VAC 0.7A/277VAC		
	INRUSH CURRENT(Typ.)		COLD START 65A(twidth=550, & measured at 50% lpeak) at 230VAC; Per NEMA 410		
	MAX. No. of PSUs on 16A CIRCUIT BREAKER		3 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC		
	LEAKAGE CURRENT		<0.75mA / 277VAC		
	NO LOAD / STANDBY POWER CONSUMPTION		No load power consumption <0.5W for Blank / A / Dx / D2-Type Standby power consumption <0.5W for B / AB / DA-Type		
	OVER CURRENT		95 ~ 108% Constant current limiting, recovers automatically after fault condition is removed		
	SHORT CIRCUIT		Hiccup mode, recovers automatically after fault condition is removed		
PROTECTION	OHORT ORGOTT		54 ~ 62V		
INOILOIION	OVER VOLTAGE		Shut down output voltage, re-power on to recover		
	OVER TEMPERATURE		Shut down output voltage, re-power on to recover		
	WORKING TEMP.		Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)		
	MAX. CASE TEMP.		Tcase=+90°C		
	WORKING HUMIDITY		20 ~ 95% RH non-condensing		
ENVIRONMENT	STORAGE TEMP., HUMIDITY		-40 ~ +80°C, 10 ~ 95% RH		
	TEMP. COEFFICIENT		±0.03%°C (0~60°C)		
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes		
			UL8750(type"HL")(except for BE-type), CSA C22.2 No. 250.13-12;		
	SAFETY STANDARDS		IEC/EN/AS/NZS 61347-1,IEC/EN/AS/NZS 61347-2-13 independent,		
			EN62384,BIS IS15885(for 12/12B/12DA/24/24B/24DA/36A/42/42A/48A/54 only),		
SAFETY &			EAC TP TC 004,GB19510.1,GB19510.14; IP65 or IP67; KC61347-1,KC61347-2-13 approved		
	DALI STANDARDS		Compliance to IEC62386-101,102,207 for DA-Type only		
EMC	WITHSTAND VOLTAGE		I/P-O/P:3.75KVAC I/P-FG:2.0KVAC O/P-FG:1.5KVAC		
	ISOLATION RES	SISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH		
	EMC EMISSION		Compliance to EN55015, EN61000-3-2 Class C (@load ≥ 60%); EN61000-3-3; GB17743, GB17625.1, EAC TPTC020; KCKN15, KN61547		
	EMC IMMUNITY		Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level (surge immunity Line-Earth 6KV, Line-Line 4KV), EAC TPTC 020; KC KN15, KN61547		
OTHERS	MTBF		899.8K hrs min. Telcordia SR-332 (Bellcore) 313.66Khrs min. MIL-HDBK-217F (25°C)		
	DIMENSION		219*63*35.5mm (L*W*H)		
	PACKING		0.95Kg; 16pcs/16.0kg/0.77CUFT		
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature. 2. Please refer to "DRIVING METHODS OF LED MODULE". For DA-Type, Constant Current region is 60%~100% of maximum voltage under rated power delivery. 3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.				
	4. Tolerance : ir	ncludes set up to	plerance, line regulation and load regulation.		
			nder low input voltages. Please refer to "STATIC CHARACTERISTICS" sections for details.		
			neasured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. s a component that will be operated in combination with final equipment. Since EMC performance will be affected by the inal equipment manufacturers must re-qualify EMC Directive on the complete installation again. cal life expectancy of >50,000 hours of operation when Tcase, particularly to point (or TMP, per DLC), is about 80°C or less. by statement on MEAN WELL's website at http://www.meanwell.com .		
	complete inst	tallation, the fina			
			statement on MEAN WELL's website at <u>http://www.meanweil.com</u> . erating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).		
			nd IP water proof function installation caution, please refer our user manual before using.		
	nttps://www	w.meanwell.co	m/Upload/PDF/LED_EN.pdf File Name:ELG-150-SPEC 2018-09-30		

84~150W Constant Voltage + Constant Current LED Driver ELG-150-48


■ Block Diagram

PFC fosc: 50~120KHz PWM fosc: 60~130KHz

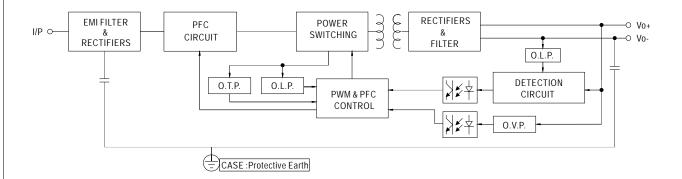

■ DRIVING METHODS OF LED MODULE

* This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

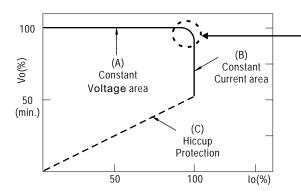


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.


Should there be any compatibility issues, please contact MEAN WELL.

◎ This characteristic applies to Blank/A/B/AB/DX/D2/BE-Type, For DA-Type, the Constant Current area is 60%~100% Vo.



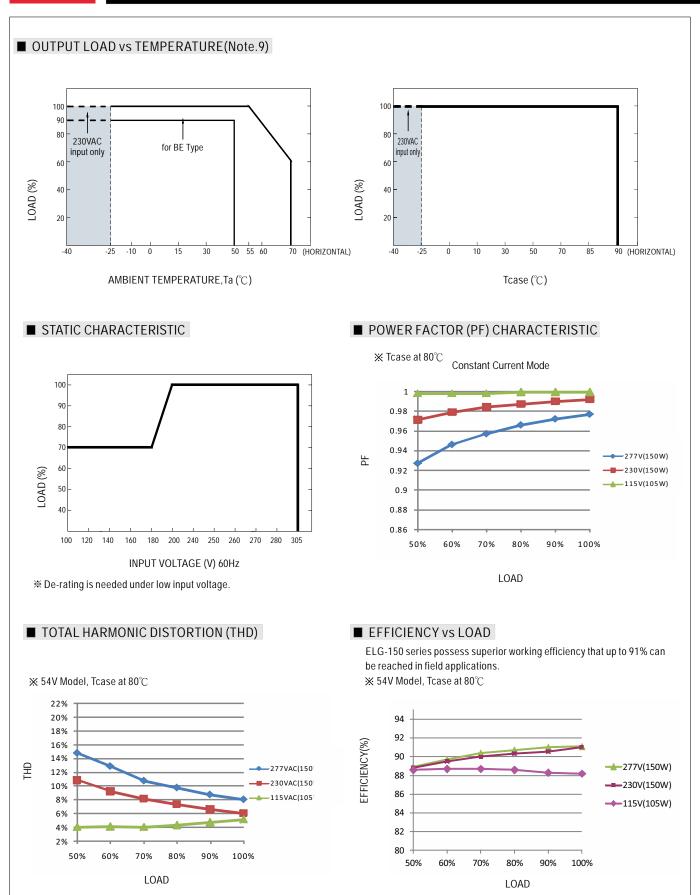


■ LIFE TIME

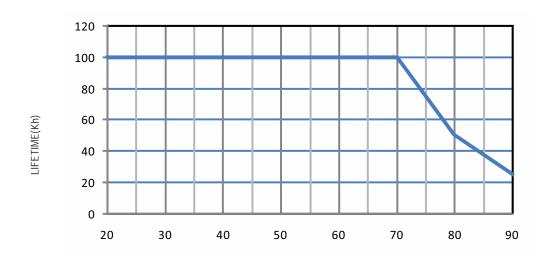


Tcase (°C)



84~150W Constant Voltage + Constant Current LED Driver $\,E\,L\,G$ - $\,1\,5\,0$ - $\,4\,8\,$

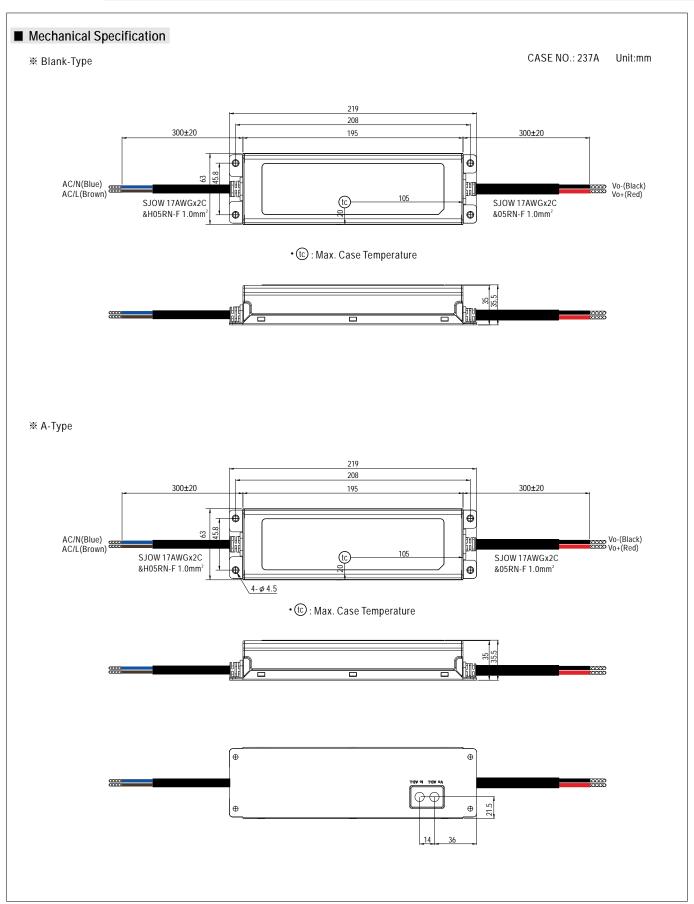


፠ BE-Type

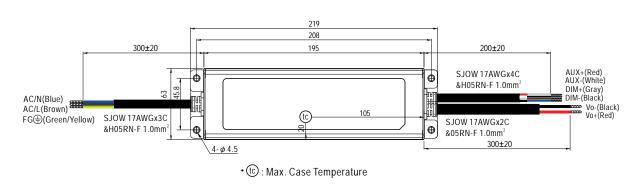



※ 3Y Model (3-wire input)

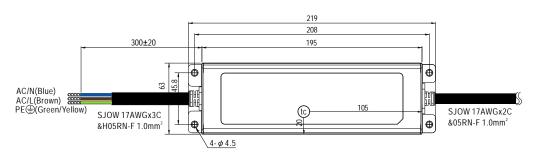

• (tc): Max. Case Temperature

- O Note1: Please connect the case to PE for the complete EMC deliverance and safety use.
- O Note2: Please contact MEAN WELL for input wiring option with PE.

■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html