

DS-2FA3616-DZ-HW

Power Adapter (36 VDC 1.67 A)


Features

- Stabilized DC voltage supplier, input voltage 100 VAC to 240 VAC
- Short circuit protection, overcurrent protection, and output over voltage protection
- Accordance with CE/GS/CCC/RCM/UL/FCC, good EMC performance, environment-friendly
- Applicable to video/audio and data communication products, such as, camera and router
- Table mount
- C8 female connector, supplied power cord of C7 male connector

Available Model

DS-2FA3616-DZ-HW

Dimension

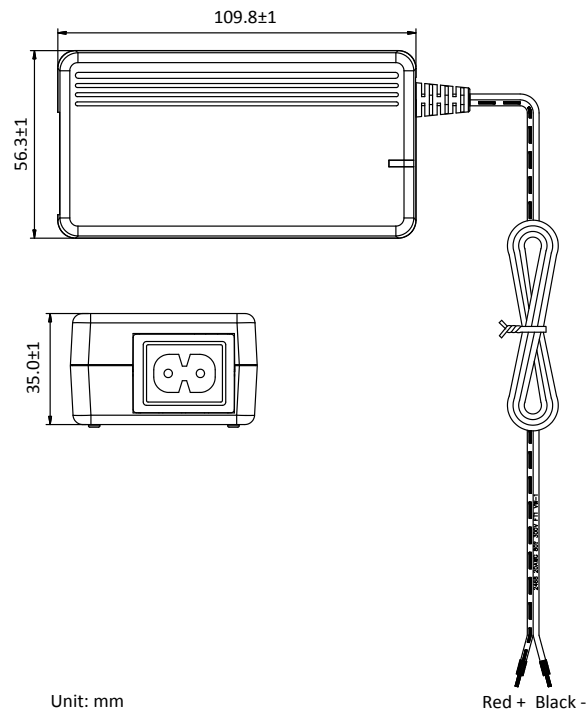

Technical Parameter

Model	DS-2FA3616-DZ-HW
Parameter	Power Adapter (36 VDC 1.67 A)
Color	Black
Mounting Type	Table mount
Input	100 VAC to 240 VAC, 50 Hz, 1.5 A
Output	36 VDC, 1.67 A
Load Regulation	±5%
Ripple & Noise	150 mVp-p
Output Power	Max. 60 W

Input Interface	C8 female, includes a power cord of C7 male connector
Output Interface	Two wire, red for positive
Wire Length	Output wire, 1500 mm
Temperature and Humidity	0°C to 40°C (32°F to 104°F), humidity 10% to 90%, no condensing
Dimension (mm/inch)	109.8 (L) × 57.3 (W) × 36.0 (H)/4.32" (L) × 2.26" (W) × 1.42 (H)
Weight (g/lb.)	108 g/0.24 lb.

Note: The full load output power is 60 W at the temperature between 0°C to 40°C (32°F to 104°F). When the adapter is used in environment of 40°C to 70°C (104°F to 158°F), the full-load output power is max. 40 W.