

## DS-K1T331 Series Face Recognition Terminal

DS-K1T331 series face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes: face authentication, etc. When installed on the turnstile, it can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.



### Available Model

- DS-K1T331
- DS-K1T331W

### Features

- 3.97-inch touch screen
- 2 MP wide-angle dual-lens
- Face anti-spoofing
- Face recognition distance: 0.3 m to 1.5 m
- Deep learning algorithm
- 300 face capacity, 1,500 card capacity (when connecting external card reader); 150,000 event capacity, and up to 20,000 captured pictures storage
- Face recognition duration < 0.2 s/User; face recognition accuracy rate ≥ 99%
- Capture linkage and captured pictures storage
- Transmits card and user data from or to the client software via TCP/IP protocol and saves the data on the client software
- Imports pictures from the USB flash drive to the device or export pictures, events, from the device to the USB flash drive
- Stand-alone operation
- Manage, search and set device data after logging in the device locally
- Connects to one external card reader via RS-485 protocol
- Connects to secure door control unit via RS-485 protocol to avoid the door opening when the terminal is destroyed




- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- Supports multiple languages: English, Spanish, and Arabic
- \* **Biometric recognition products are not 100% applicable to anti-spoofing environments. If you require a higher security level, use multiple authentication modes**

## Specifications

Model	DS-K1T331	DS-K1T331W
Operating system	Linux	
Screen	3.97-inch touch screen	
Card capacity (when connecting external card reader)	1,500	
Event capacity	150,000	
Face capacity	300	
Face recognition distance	0.3 m to 1.5 m	
Face recognition duration	< 0.2 s	
Network interface	10/100 Mbps, self-adaptive	
Camera	2 MP dual-lens camera with wide dynamic range	
Communication	TCP/IP	TCP/IP, Wi-Fi
Interface	USB × 1, electric lock × 1, door contact × 1, tamper × 1, exit button × 1, RS-485 × 1	
Power supply	12 V, 1.5 A, 18 W	
Working humidity	10 to 90% (no condensing)	
Working temperature	-10 °C to +50 °C (14 °F to +122 °F)	
Application environment	Indoor use	
Dimension (W × H × D)	120 mm × 110 mm × 23 mm (4.7" × 4.3" × 0.9")	

\* *Exposing the equipment to direct sun light, low ventilation or heat source such as heater or radiator is forbidden (ignorance can cause fire danger).*

**Dimensions**

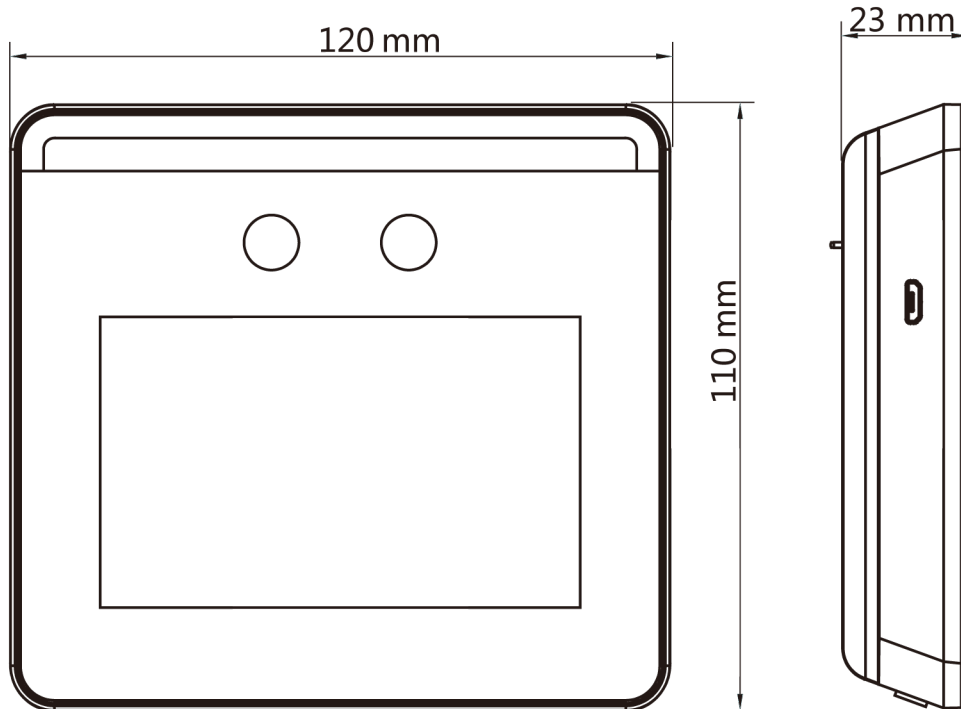

Distributed by



**HIKVISION®**

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com