

DS-D5032FC-A 32" Monitor




key Features

- Adopt 3-D digital comb filter
- True color OSD and user-friendly operation menu
- 1 channel HDMI 1.4 input interface, support HDCP
- Adopt 3D noise reduction technology
- Programmable 12-bit RGB gamma correction technology
- Support software spread-spectrum technology to reduce EMI radiation
- Adopt Mstar ACE-5 auto color and image enhancement engine, improve image contrast, detail and edge
- High reliable component for 7 x 24 h working
- Green energy: Supporting set standby mode while no signal input, set the sleep time

Model

DS-D5032FC-A

Interfaces

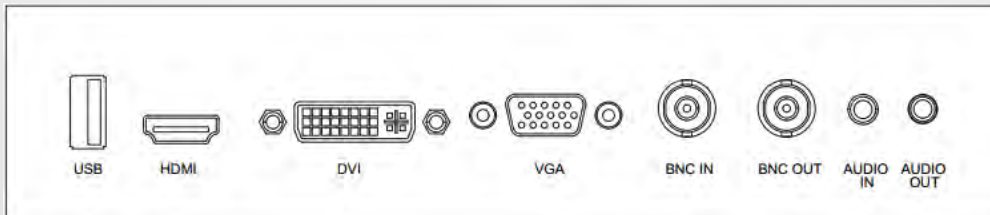

DS-D5032FC-A 32" Monitor



Specification

Model	DS-D5032FC-A	
Display Type	TFT-LED Backlight	
Screen Size	31.5"	
Dot Pitch (H×V)	0.12125 mm x 0.36375 mm	
Resolution	1920 x 1080	
Brightness	300 cd/m ²	
Contrast	1000 : 1	
Response Time	8 ms	
Color	16.7 M	
Viewable Area (H×V)	698.40 mm x 392.85 mm	
Viewing Angle	Horizontal 178°, Vertical 178°	
Interfaces	DVI Input	1
	VGA Input	1
	HDMI Input	1
	BNC Input	1
	BNC Output	1
	USB	1
	PC AUDIO-IN	1, 3.5 mm mini-jack
	PC AUDIO-OUT	1, 3.5 mm mini-jack
Speaker	2 W x 2, 6Ω	
VESA	100 mm x 100 mm	
Power Supply	100 ~ 240 V AC, 50/60 Hz	
Power Consumption	≤ 45 W	
Operation Temperature	0°C ~ 40°C	
Operation Humidity	10%~85% (No Condensation)	
Storage Temperature	-20°C ~ 60°C	
Bezel Material	Plastic	
Dimension (W×H×D)	728.8 mm x 526 mm x 167.2 mm	
Package Dimension (W×H×D)	803 mm x 513 mm x 197 mm	
Weight	9.25 Kg(Gross weight) , 5.75 Kg(Net weight)	
Included Accessories	power cord x 1, VGA cable x 1, HDMI x 1, Remote control x 1, battery x 2, user manual x 1, warranty card x 1, base bracket x 1	

DS-D5032FC-A 32" Monitor



Dimension (mm)

