


DHI-ITSXS-1301 series

Outdoor Guidance Screen

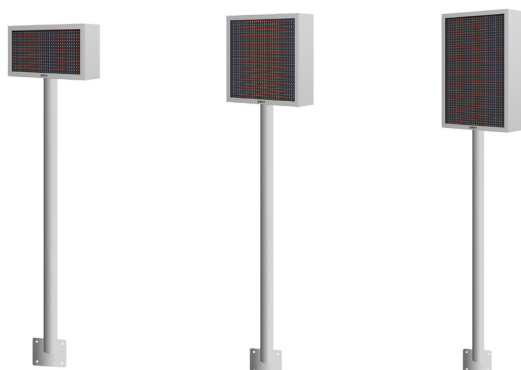

- Providing three layers display.
- Support the display of letters, numbers, arrows and handicap parking signs.
- Support high-brightness display and adjustable brightness.
- Controls multiple screens at the same time and supports displaying in partitions.
- Modifies IP and updates the program with the configuration application.

System Overview

The DHI-ITSXS-1301 outdoor serise product is used in the outdoor parking area. Guide the vehicle to find the available parking space quickly and improve the parking efficiency.

Scene

Applicable to malls, hospitals, schools, residential areas, office buildings, stations and parking lots.

Technical Specification

Basic

Monitor	LED (Display in red, green, and yellow colors)
Dimensions	320 mm × 160 mm (12.60" × 6.30") (L × W) 320 mm × 320 mm (12.60" × 12.60") (L × W) 320 mm × 480 mm (12.60" × 18.90") (L × W)
Display Content	Chinese characters, letters, numbers, arrows, the handicap parking sign, and more
Pixels Configuration	1R1PG
Resolution	512 dots (32 × 16); 1 line; pixel pitch: 10 mm (0.39") 1024 dots (32 × 32); 2 line; pixel pitch: 10 mm (0.39") 1536 dots (32 × 48); 3 lines; pixel pitch: 10 mm (0.39")
Service Life	100,000 hours
Screen Brightness	6000 cd/m ² (adjustable)

Port

Network Port	1 × 100 Mbps Ethernet port (RJ-45)
--------------	------------------------------------



General

Power Supply	100 V–240 V AC
Power Consumption	30 W, 60W, 90W
Operating Temperature	–30 °C to +70 °C (–22 °F to +158 °F)
Operating Humidity	10%–90% (non-condensing)
IP Rating	IP54
Product Dimensions	362 mm × 110 mm × 202 mm (14.25" × 4.33" × 7.95") (L × W × H) 362 mm × 110 mm × 362 mm (14.25" × 4.33" × 14.25") (L × W × H) 362 mm × 110 mm × 522 mm (14.25" × 4.33" × 20.55") (L × W × H)
Net Weight	5 kg (11.02 lb), 7.3 kg (16.09 lb), 9.5 kg (20.94 lb)
Gross Weight	6 kg (13.23 lb), 8.3 kg (18.3 lb), 10.5 kg (23.15 lb)
Installation	Pole mount; Pole mount bracket

Ordering Information

Type	Model	Description
Outdoor guidance screen	DHI-ITSXS-1301-12	Outdoor guidance screen (one way)
	DHI-ITSXS-1301-22	Outdoor guidance screen (two ways)
	DHI-ITSXS-1301-32	Outdoor guidance screen (three ways)
Accessories	ITSXS-1301-0F	Pole mount
	ITSZJ-4201	Pole mount bracket

Installation

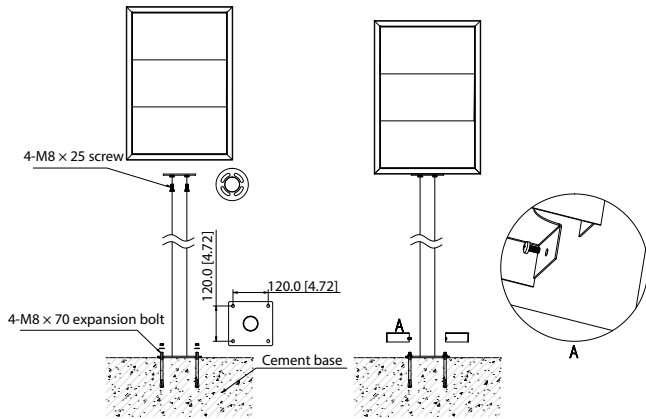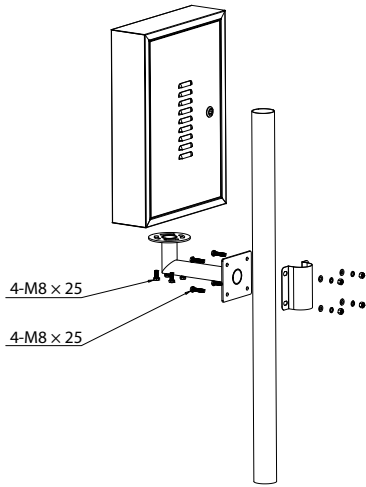

Dimensions (mm[inch])

