

DS-2CD2121G0-I(W)(S) 2 MP IR Fixed Dome Network Camera



- High quality imaging with 2 MP resolution
- Efficient H.265+ compression technology
- Clear imaging against strong back light due to 120 dB true WDR technology
- Water and dust resistant (IP67) and vandal proof (IK10)
- Support up to 256 GB SD card storage



▪ Specification

| Camera | |
|--------------------------|---|
| Image Sensor | 1/2.7" Progressive Scan CMOS |
| Min. Illumination | Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR |
| Shutter Speed | 1/3 s to 1/100,000 s |
| Slow Shutter | Yes |
| Wide Dynamic Range | 120 dB |
| Day & Night | IR Cut Filter |
| Angle Adjustment | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355° |
| Lens | |
| Focal Length & FOV | 2.8 mm: horizontal FOV 111.6°, vertical FOV 59.1°, diagonal FOV 133.9° 4 mm: horizontal FOV 91.5°, vertical FOV 46.1°, diagonal FOV 109.8° 6 mm: horizontal FOV 56°, vertical FOV 29.8°, diagonal FOV 65.3° |
| Lens Mount | M12 |
| Focus | Fixed |
| Aperture | F1.6 |
| Illuminator | |
| IR Range | Up to 30 m |
| IR Wavelength | 850 nm |
| Video | |
| Max. Resolution | 1920 × 1080 |
| Main Stream | 50 Hz: 25 fps (1920 × 1080, 1280 × 720) 60 Hz: 30 fps (1920 × 1080, 1280 × 720) |
| Sub-Stream | 50 Hz: 25 fps (640 × 480, 640 × 360) 60 Hz: 30 fps (640 × 480, 640 × 360) |
| Video Compression | Main stream: H.265/H.264 Sub-stream: H.265/H.264/MJPEG |
| Video Bit Rate | 32 Kbps to 8 Mbps |
| H.264 Type | Baseline Profile/Main Profile/High Profile |
| H.265 Type | Main Profile |
| H.264+ | Main stream supports |
| H.265+ | Main stream supports |
| Region of Interest (ROI) | Support 1 fixed region for main stream |
| Network | |
| Protocols | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP™, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour, IPv4, UDP, SSL/TLS |
| Simultaneous Live View | Up to 6 channels |
| API | Open Network Video Interface, ISAPI |
| User/Host | Up to 32 users. 3 levels: administrator, operator and user |
| Network Storage | Support Micro SD/SDHC/SDXC card (256 GB), local storage and NAS (NFS, SMB/CIFS), ANR |
| Client | iVMS-4200, Hik-Connect, Hik-Central |

| | |
|----------------------------------|---|
| Web Browser | Plug-in required live view: IE 10+ Plug-in free live view: Chrome 57.0+, Firefox 52.0+ Local service: Chrome 57.0+, Firefox 52.0+ |
| Image | |
| Image Settings | Rotate mode, saturation, brightness, contrast, sharpness and white balance adjustable by client software or web browser |
| Day/Night Switch | Day, Night, Auto, Schedule |
| Image Enhancement | BLC, 3D DNR |
| Interface | |
| Ethernet Interface | 1 RJ45 10 M/100 M self-adaptive Ethernet port |
| On-Board Storage | Built-in Micro SD slot, up to 256 GB |
| Audio | -S: 1 input (line in), 1 output (line out) |
| Alarm | -S: 1 input, 1 output (max. 12 VDC, 30 mA) |
| Hardware Reset | Yes |
| Event | |
| Smart Event | Line crossing detection, intrusion detection |
| General | |
| Linkage Method | Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger recording, trigger capture |
| Camera Material | Metal & Plastic |
| Camera Dimension | Ø110.8 mm × 84.7 mm (Ø 4.4" × 3.3") |
| Package Dimension | 135 mm × 135 mm × 110 mm (5.3" × 5.3" × 4.3") |
| Camera Weight | Approx. 497 g (1.1 lb.) |
| With Package Weight | Approx. 597 g (1.3 lb.) |
| Startup and Operating Conditions | -30 °C to 60 °C (-22 °F to 140 °F). Humidity: 95% or less (non-condensing) |
| Storage Conditions | -30 °C to 60 °C (-22 °F to 140 °F). Humidity: 95% or less (non-condensing) |
| Web Client Language | 33 languages English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian |
| General Function | One-key reset, anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter |
| Firmware Version | V5.5.120 |
| Power Supply | 12 VDC ± 25% PoE: 802.3af, Class 3 |
| Power Interface | Ø5.5 mm coaxial power plug |
| Power Consumption and Current | 12 VDC, 0.4 A, max. 5 W PoE: (802.3af, 36 V to 57 V), 0.20 A to 0.15 A, max. 6.5 W |
| Approval | |
| EMC | FCC SDoC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 50130-4: 2011 +A1: 2014); RCM (AS/NZS CISPR 32: 2015); IC VoC (ICES-003: Issue 6, 2016); KC (KN 32: 2015, KN 35: 2015) |


| | |
|-------------|---|
| Safety | UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013, IEC 62368-1:2014); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013, IEC 62368-1:2014); BIS (IS 13252(Part 1):2010+A1:2013+A2:2015); LOA (IEC/EN 60950-1) |
| Environment | CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006) |
| Protection | IP67 (IEC 60529-2013) |

▪ **Available Model**

DS-2CD2121G0-I (2.8/4/6 mm)

DS-2CD2121G0-IS (2.8/4/6 mm)

▪ **Dimension**

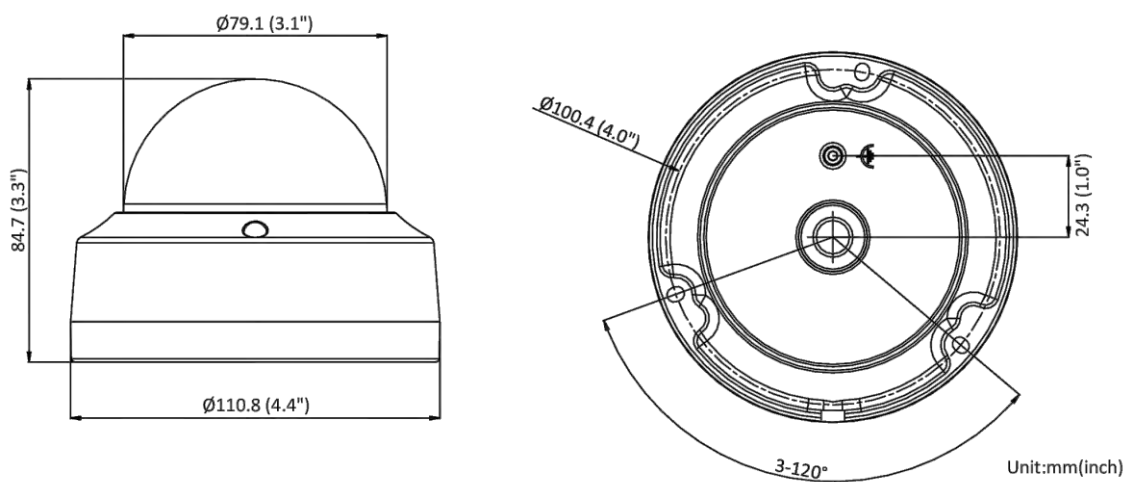

▪ **Accessory**

▪ **Optional**

| | | | | |
|--|--|--|--|---|
| DS-1280ZJ-DM18 Junction Box | DS-1276ZJ-SUS Corner Mount | DS-1271ZJ-110 Pendant Mount | DS-1258ZJ Wall Mount | DS-1250ZJ Rain Shade |
|  |  |  |  |  |
| DS-1272ZJ-110 Wall Mount | DS-1275ZJ-SUS Vertical Pole Mount | DS-1259ZJ Inclined Ceiling Mount | DS-1272ZJ-110B Wall Mount | |
|  |  |  |  | |

Distributed by

HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 [216]521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com