




# DH-IPC-HDW3441EMP-S-0280B-S2

**Dahua**



Dahua DH-IPC-HDW3441EMP-S-0280B-S2. Dahua WizSense IP Dome. 4MP@25/30ips, Smart H.265+. ICR, 0.005/0.0005 lux, Smart IR 50m. 2.8mm fixed optics. WDR 120dB, 3D-DNR, 4 ROI. Perimeter protection. Built-in microphone. MicroSD slot, RJ45, Onvif, IP67, 3AXIS, PoE. Dh-ipc-hdw3441emp-s-0280b-s2.

- 4 megapixel 1/3" CMOS sensor
- Compression formats: Smart H.265+, Smart H.264+, H.265, H.264, MJPEG
- Digital resolution: 4MP (2688x1520), 4MP (2560x1440), 3MP (2048x1536), 3MP (2304x1296), 1080P (1920x1080), 1.3MP (1280x960), 720P (1280x720), D1 (704x576), VGA (640x480), CIF (352x288)
- Stream 1: 4MP (1~25/30 ips)
- Stream 2: D1 (1~25/30 fps)
- Stream 3: 1080P (1~25/30 fps)
- Day/night mode with removable mechanical filter
- Smart IR: 2 IR LEDs, 50 meter range
- 0.005 lux F1.4 (colour), 0.0005 lux F1.4 (B/W), 0 lux IR On
- 2.8 mm fixed optics
- Angle of view: 102°(H), 54°(V), 121°(D)
- Imaging modes: BLC, HLC, WDR 120dB, 3D-NR, AFSA, Mirror, Defog
- White balance with 6 modes
- Automatic gain control
- Supports 4-zone videosensor, 4 regions of interest (ROI) and 4-zone privacy mask
- Perimeter protection with cross-line detection and intrusion detection (both modes support person/vehicle classification)
- Built-in microphone
- MicroSD card slot up to 256GB (not included)
- Network interface: RJ45 (10/100 Base-T)
- Network protocols: IPv4, IPv6, HTTP;TCP, UDP, ARP, RTP, RTP, RTSP, RTCP, RTMP, SMTP, FTP, SFTP, DHCP, DNS, DDNS, QoS, UPnP, NTP, Multicast, ICMP, IGMP, NFS, SAMBA, PPPoE, SNMP
- ONVIF (Profile S/G/T), CGI, P2P, Milestone, Genetec, SDK, API support
- Up to 20 users

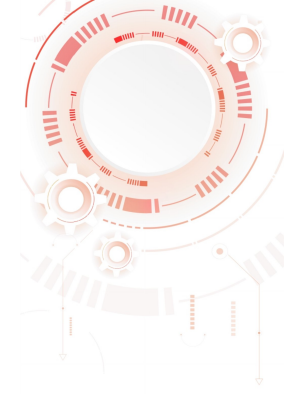

- Remote viewing via IE11, Chrome and Firefox browsers
- Smart PSS, DSS, DMSS management software
- Compatible with IOS and Android mobile devices
- Power supply: 12V DC / PoE (802.3af)
- Maximum power consumption: 7.1W (12V) / 7.9W (PoE)
- Storage temperature from -40°C ~ +60°C
- Operating temperature: -40°C ~ +60°C (-40°C ~ +60°C)
- Relative humidity: <95%.
- IP67 degree of protection
- Metal housing
- Dimensions: Ø106 x 93.6 (H) mm
- Weight: 500 g
- 3AXIS: 0°~360°(PAN), 0°~78°(TILT), 0°~360°(Rotation)

- DAHUA-2056N-FO