


XNB-6005

2M Network Camera

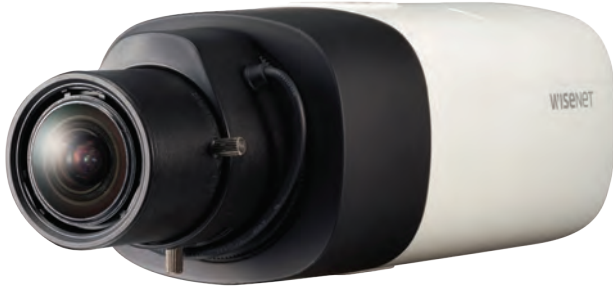


* Lens not included

Key Features

- Max. 2Megapixel (1920 x 1080) resolution
- 0.006 Lux@F1.2 (Color), 0.0006 Lux@F1.2 (B/W)
- Max. 60fps@all resolutions (H.265 / H.264)
- H.265, H.264, MJPEG codec Supported, Multiple streaming
- Day & Night (ICR), WDR (150dB), Defog
- Digital image stabilization with built-in Gyro sensor
- Loitering, Directional detection, Fog detection, Audio detection, Digital auto tracking, Sound classification, Tampering
- Motion detection, Handover
- SD / SDHC / SDXC memory slot (Max. 512GB)
- Hallway View, WiseStreamII Support
- LDC, PoE / 24V AC, 12V DC, Bi-directional audio Support

Dimensions

Unit : mm (inch)

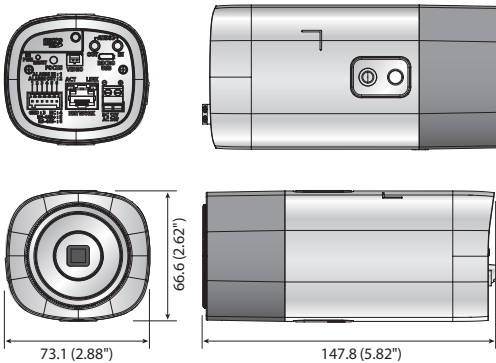

Accessories (Optional)



SHB-4300H/4300H1/4300H2/4300HP

SHB-4200/4200H

STH-200

STB-400

STB-4150V

XNB-6005

| | |
|------------------------------------|--|
| VIDEO | |
| Imaging Device | 1/2" 2.17M CMOS |
| Total Pixels | 1,952(H) x 1,113(V) approx 2.17M pixels |
| Effective Pixels | 1,945(H) x 1,097(V) approx 2.13M pixels |
| Scanning System | Progressive Scan |
| Min. Illumination | Color : 0.006 Lux (1/30sec, F1.2), B/W : 0.0006 Lux (1/30sec, F1.2) |
| S / N Ratio | 50dB |
| Video Out | CVBS : 1.0Vpp / 75Ω composite, 720 x 480(N), 720 x 576(P), for Installation USB : Micro USB Type B, 1280 x 720 for Installation |
| LENS | |
| Focus Control | Simple focus / Manual, Remote control via network, Button control (Simple focus) |
| Lens Type | Manual, DC Auto Iris, P-Iris, i-CS |
| Mount Type | C / CS |
| OPERATIONAL | |
| Camera Title | Off / On (Displayed up to 85 Characters) - W/W : English / Numeric / Special Characters - China : English / Numeric / Special / Chinese Characters - Common : Multi-line (Max. 5), Color (Gray / Green / Red / Blue / Black / White), Transparency, Auto scale by Resolution |
| Day & Night | Auto (ICR) / Color / B/W / External / Schedule |
| Backlight Compensation | Off / BLC / HLC / WDR |
| Wide Dynamic Range | 150dB |
| Contrast Enhancement | SSDR (Off / On) |
| Digital Noise Reduction | SSNRV (2D + 3D Noise filter) (Off / On) |
| Digital Image Stabilization | Off / On (Built-in Gyro sensor) |
| Defog | Off / Auto / Manual |
| Motion Detection | Off / On (8ea, 8point polygonal zones), Handover |
| Privacy Masking | Off / On (32ea, polygonal zones) - Color : Gray / Green / Red / Blue / Black / White - Mosaic |
| Gain Control | Off / Low / Middle / High / Manual |
| White Balance | ATW / AWC / Manual / Indoor / Outdoor / Mercury / Sodium |
| LDC (Lens Distortion Correction) | Off / On (5 Levels with min / max) |
| Electronic Shutter Speed | Minimum / Maximum / Anti Flicker (2 ~ 1/12,000sec) |
| Digital PTZ | 24x, Digital PTZ (Preset_Group) |
| Flip / Mirror | Off / On, Hallway View : 90°/270° |
| Video & Audio Analytics | Tampering, Loitering, Directional detection, Defocus detection, Fog detection, Virtual line, Enter/Exit, (Dis) Appear, Audio detection, Face detection, Motion detection, Digital auto tracking, Sound classification |
| Alarm I/O | Input 1ea / Output 1ea |
| Remote Control Interface | RS-485 / 422 |
| RS-485 Protocol | Samsung-T/E, Pelco-D/P, Panasonic, Honeywell, AD, Vicon, GE, Bosch, Sungjin |
| Alarm Triggers | Alarm Input, Motion detection, Video & Audio Analytics, Network disconnect |
| Alarm Events | File upload Via FTP, E-Mail, Notification via e-mail, Local storage (SD / SDHC / SDXC) or NAS recording at event triggers, External output, DPTZ preset |
| Pixel Counter | Support |
| NETWORK | |
| Ethernet | RJ-45 (10/100 BASE-T) |
| Video Compression Format | H.265 / H.264 (MPEG-4 part 10/AVC) : Main / Baseline / High, MJPEG |
| Resolution | 1920 x 1080, 1280 x 1024, 1280 x 960, 1280 x 720, 1024 x 768, 800 x 600, 800 x 448, 720 x 576, 720 x 480, 640 x 480, 640 x 360, 320 x 240 |
| Max. Frame rate | H.265 / H.264 : Max. 60fps at all resolutions, MJPEG : Max. 30fps |
| Smart Codec | Manual Mode (Area-based : 5ea) |
| WiseStreamII | Support |
| Video Quality Adjustment | H.265 / H.264 / MJPEG : Target Bitrate Level Control |
| Bitrate Control Method | H.265 / H.264 : CBR or VBR, MJPEG : VBR |
| Streaming Capability | Multiple streaming (Up to 10 Profiles) |
| Audio In | Selectable (Mic in / Line in), Built-in MIC Supply voltage : 2.5V DC (4mA), Input Impedance : Approx. 2K Ohm |
| Audio Out | Line out (3.5mm mono jack), Max output level : 1 Vrms |
| Audio Compression Format | G.711 u-law/G.726 Selectable, G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps, AAC-LC : 48Kbps at 8 / 16 / 32 / 48KHz |
| Audio Communication | Bi-directional (2-way) |
| IP | IPv4, IPv6 |
| Protocol | TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3 (MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour |
| Security | HTTPS (SSL) Login authentication, Digest login authentication, IP address filtering, User access log, 802.1X Authentication (EAP-TLS, EAP-LEAP) |
| Streaming Method | Unicast / Multicast |
| Max. User Access | 20 Users at Unicast Mode |
| Edge Storage | SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording (1'st slot to 2'nd slot) - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage), Local PC for Instant recording |
| Application Programming Interface | ONVIF profile S/G, SUNAPI (HTTP API), Open Platform |
| Webpage Language | English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek Supported OS : Windows 7, 8, 10, Mac OS X 10.10, 10.11, 10.12 Non-plugin Web Viewer - Supported Browser : Google Chrome 56, MS Edge 39, Mozilla Firefox 61 (Window 64bit only), Apple Safari 10 (Mac OS X only) |
| Web Viewer | Plug-in Web Viewer - Supported Browser : MS Explore 11, Apple Safari 10 (Mac OS X only) SmartViewer |
| Central Management Software | |
| ENVIRONMENTAL | |
| Operating Temperature / Humidity | -10°C ~ +55°C (+14°F ~ +131°F) / Less than 90% RH |
| Storage Temperature / Humidity | -30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH |
| ELECTRICAL | |
| Input Voltage / Current | 24V AC ±10%, 12V DC ±10%, PoE (IEEE802.3af, Class3) |
| Power Consumption | Max. 9W (24V AC), Max. 8W (12V DC), Max. 8.5W (PoE) |
| MECHANICAL | |
| Color / Material | Black, Ivory / Plastic |
| Dimensions (WxHxD) | 73.1 x 66.6 x 147.8mm (2.88" x 2.62" x 5.82") |
| Weight | 420g (0.93 lb) |

* The latest product information / specification can be found at hanwha-security.com
* Design and specifications are subject to change without notice.