


2-wire indoor monitor



- HYUNDAI indoor IP monitor
- 7 inch touch screen with resolution 1024x600
- 3 touch buttons
- Stores captured images on SD card
- Bidirectional audio
- Volume adjustment
- Incorporates WiFi
- Powered from 2-wire distributor

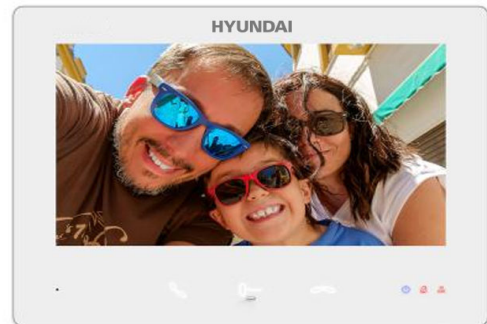

Reference / Model

HYU-1072 / HYU-1072

Embedded Linux operating system

128MB RAM memory

32MB flash memory

Embedded processor

7" capacitive TFT touch screen (1024x600)

3 touch buttons (Answer, Unlock, Hang up) and 1 physical button (reboot)

Built-in omnidirectional microphone

Built-in speakerphone

G.711U, G.711A audio compression

Noise suppression and echo cancellation

Adjustable volume

Event capacity: Up to 200 snapshots (SD card)

Capacity for up to 3 connected indoor extensions

2-wire indoor monitor

Reference / Model	HYU-1072 / HYU-1072
	Built-in WiFi (IEEE802.11b/g/n) at 2.4GHz
	Network protocol: TCP/IP, RTSP
	1 alarm input
	Two-wire IP interface: 1 input / 1 output
	SD 2.0 card slot up to 128GB (card not included)
	5 decimal DIP switches and 4 binary DIP switches
	48V power supply not included
	Power consumption: $\leq 1.2W$ (standby), $\leq 5W$ (maximum)
	Operating temperature: $-10^{\circ}C \sim +50^{\circ}C$
	Operating humidity: 10% ~ 90% (non-condensing)
	Indoor installation environment
	Surface mount
	Dimensions: 190.2 (W) x 138.2 (H) x 20 mm