


HYU-1055

HYU-1055

HYUNDAI

HYUNDAI WiFi IP Video Door Station

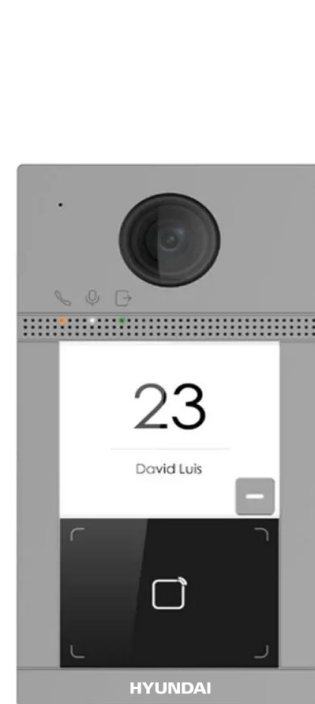

- HYUNDAI WiFi IP video door station
- 2MP camera with IR supplement and WDR
- 1 call button
- Built-in microphone and speaker
- Mifare reader
- Up to 2000 users and 10 000 cards
- 4 alarm inputs
- IP65 and IK08 protection
- 12V DC / PoE

Reference / Model

HYU-1055 / HYU-1055

Embedded Linux operating system

Physical push-button calling

2-megapixel camera with infrared supplement

Viewing angle: 124°(H), 75°(V)

H.264 video compression

Primary stream resolution: 1080P at 25 fps

Secondary stream resolution: VGA at 25 fps

Backlight compensation with true WDR

Built-in omnidirectional microphone and loudspeaker

Bi-directional voice intercom

G.711U and G.711A audio compression

Noise suppression and echo cancellation

Adjustable volume

HYUNDAI WiFi IP Video Door Station

Reference / Model	HYU-1055 / HYU-1055
	13.56Mhz Mifare reader
	Capacity up to 2000 users
	Capacity up to 10,000 cards
	10/100Mbps Ethernet port
	Protocols: TCP/IP, RSTP
	Built-in WiFi 802.11 b/g/n 2.4GHz
	1 RS485 port
	Tamper tamper
	TF card slot
	4 alarm inputs
	Up to 2 exit buttons
	2 door contact inputs
	2 door control ports
	Power supply: 12V DC / PoE (802.3af)
	Power consumption: <10W
	Operating temperature from -40°C ~ +53°C
	Operating humidity 10% ~ 95%
	IP65 degree of protection
	Vandal protection IK08
	Dimensions: 91 (W) x 174 (H) x 29 mm
	Weight: 380 g
	Surface installation