

# HYU-1061


SF-VIMOD-CAM-IP

HYUNDAI

## HYUNDAI 1-module video door entry system



- HYUNDAI IP video door entry module
- 2MP camera with IR supplement and WDR
- 1 call button
- Built-in microphone and loudspeaker
- Up to 2000 users and 6000 cards
- 4 alarm inputs
- IP65 protection
- 12V DC

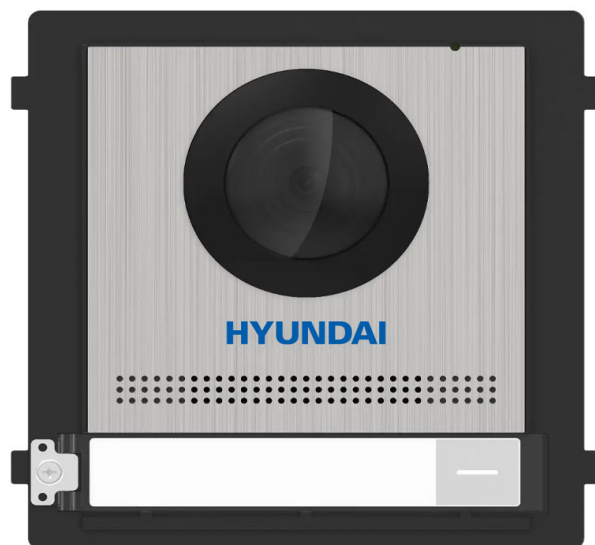

### Reference / Model

HYU-1061 / SF-VIMOD-CAM-IP

Embedded processor

Embedded Linux operating system

1 call button

2 megapixel low-light camera with IR supplement

Viewing angle: 146°(H), 82°(V)

H.264 video compression

Picture modes: WDR

Built-in omni-directional microphone

Built-in speaker

Audio Compression G.711U, G.711A

64Kbps audio compression rate

Noise suppression and echo cancellation

Adjustable volume

**HYUNDAI 1-module video door entry system**

<b>Reference / Model</b>	<b>HYU-1061 / SF-VIMOD-CAM-IP</b>
	Capacity up to 2000 users and 6000 cards
	Allows connection of up to 500 indoor substations
	Allows connection of up to 16 video door entry substations
	Auto-adaptive 10/100Mbps Ethernet port
	Protocols: TCP/IP, RSTP
	RS485 port (for submodule connection)
	Tamper tamper
	4 alarm inputs
	2 exit buttons
	1 door contact input
	2 door lock relays
	12V DC, 500 mA power output
	Power: 12V DC / PoE (802.3af)
	Power consumption: ≤5W
	Operating temperature from -40°C ~ +60°C
	Operating humidity 10% ~ 95%
	IP65 degree of protection
	Dimensions: 100 (W) x 98 (H) x 42 mm
	Weight: 410 g