

DS-QAZ0110G1-S 10 W Secondary Speaker



- Connect to the primary speaker to help boost the volume of sound.


▪ Specification

Speaker	
Rated Power	10 W
Impedance	8 Ω
Sensitivity(1 m, 1 W)	90 dB
Direction	All directions
Max. Acoustic Pressure	98 dBSPL
Frequency Response	100 Hz to 20 kHz
Interface	
Audio In	Fixed resistance input × 1, 8 Ω
General	
Material	Wooden
Operating Temperature	-10 °C to 50 °C(14 °F to 122 °F)
Operating Humidity	< 90% (No condensation)
Dimension	180.6 mm × 156 mm × 280 mm(7.11" × 6.14" × 11.02")
Package Dimension	260 mm × 250 mm × 220 mm(10.24" × 9.84" × 8.66")
Weight	Approx. 0.4 kg (0.88 lb.)
With Package Weight	Approx. 0.5 kg (1.1 lb.)
Color	Black
Packing List	Device × 1 Screw pack × 1 Installation sticker × 1 Regulatory Compliance and Safety Information × 1

▪ Available Model

DS-QAZ0110G1-S

▪ Dimension

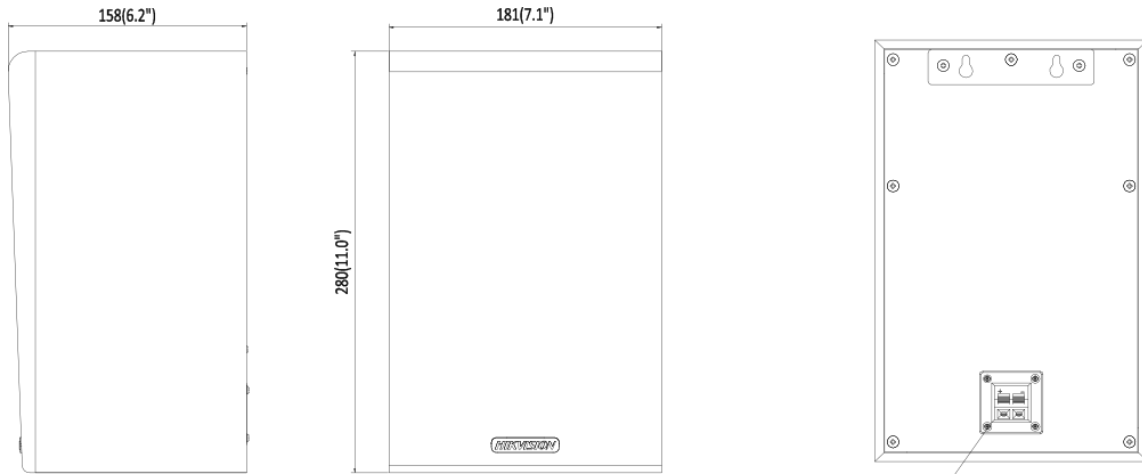

Unit: mm (inch)

Rated
Resistance
Input Port

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

