

**DCZ****UNIVERSAL KEYBOARD FOR MANAGING CCTV APPLICATIONS FROM PC****MAIN FEATURES**

USB keyboard for managing CCTV applications, with joystick and jog shuttle

Functions determined by the controlled application

Customizable features

The user can easily personalize and print several pre-cut sheets supplied for this purpose

The keyboard can be turned round so that both right- and left-handed users can use all the functions with ease

HID Game Controller emulation for the use with the most important VMS (Avigilon Control Center, Ganz-VsolP, Exacq Vision, Milestone XProtect®, Genetec Omnicast 4.2, Mirasys-DVMS, Seetec ProBox, Sony-Real Shot Manager, Luxriot DVR)\*

*\*Functionality may be limited depending on the VMS used.*

**DESCRIPTION**

The DCZ keyboard comes with jog shuttle, joystick 38 backlit keys, alarm buzzer, and allows the management of CCTV applications from a PC, via USB connection. It can be easily integrated with control systems using basic programming techniques without an SDK.

The keys are recognized in any combination configured by the programmer: the application receives an event message whenever a key is pressed or released.


The DCZ keyboard can control PC applications already on the market, emulating a 4-axis 38 keys HID joystick. It can also be used together with ordinary PC peripheral devices such as keyboards, mouse, joysticks or other accessories.

It is USB powered and so requires only one cable.

The use of the keyboard can be made even more intuitive by personalizing the captions on the key panel: the user can easily personalize the key panel by printing the supplied pre-cut sheets (templates can be downloaded from [www.videotec.com/DCZ](http://www.videotec.com/DCZ)).

The keyboard can be turned round so that both right- and left-handed users can use all the functions with ease.

This simple, user-friendly and fully implementable DCZ keyboard allows a comfortable and intuitive management of CCTV applications from PC.

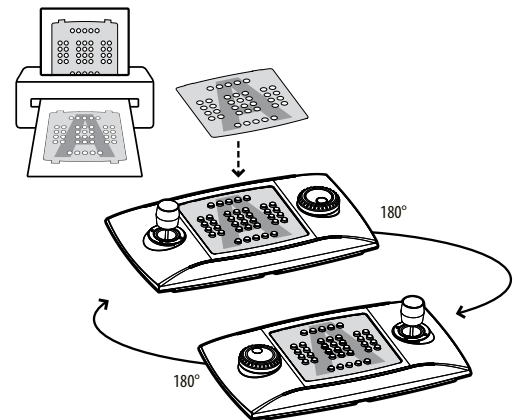

THE USER CAN EASILY PERSONALIZE AND PRINT SEVERAL PRE-CUT SHEETS SUPPLIED FOR THIS PURPOSE.

THE KEYBOARD CAN BE TURNED ROUND SO THAT BOTH RIGHT- AND LEFT-HANDED USERS CAN USE ALL THE FUNCTIONS WITH EASE.

**TECHNICAL DATA**

**GENERAL**

Backlit rubber keys  
Alarm buzzer

**MECHANICAL**

Dimensions: 379x89x224mm (15x3.5x8.8in)  
Unit weight: 1.4kg (3lb)

**ELECTRICAL**

USB powered  
Consumption: 350mA max

**COMMUNICATIONS**

USB 2.0

**PROTOCOLS**

Dedicated Virtual Com Port protocol  
Joystick HID 4-axis 40 keys emulation

**OPERATING SYSTEM**

Windows® compatible (drivers available on [www.videotec.com/DCZ](http://www.videotec.com/DCZ)): Windows® 2000, Windows® XP, Windows® Server, Windows® Vista, Windows® 7, Windows® 8  
Linux® compatible

**ENVIRONMENT**

**CERTIFICATIONS**

CE: EN55022 Class B, EN50130-4, EN61000-6-3, EN60950-1  
FCC Part 15, Class B  
cULus Listed  
Indoor  
Operating temperature: 0°C (32°F)/+45°C (+113°F)

**ACCESSORIES**



ODCKIT38 Pre-cut sheets for printing customized masks and protective transparent plastic layer

**PACKAGE**

Model Number	Weight	Dimensions (WxHxL)	Master carton
DCZ	1.9kg (4.2lb)	42.5x27x17.5cm (16.7x10.6x7in)	4

**TECHNICAL DRAWINGS**

Sizes in millimeters.

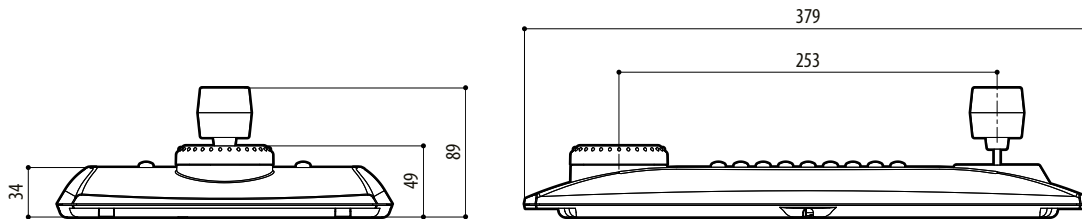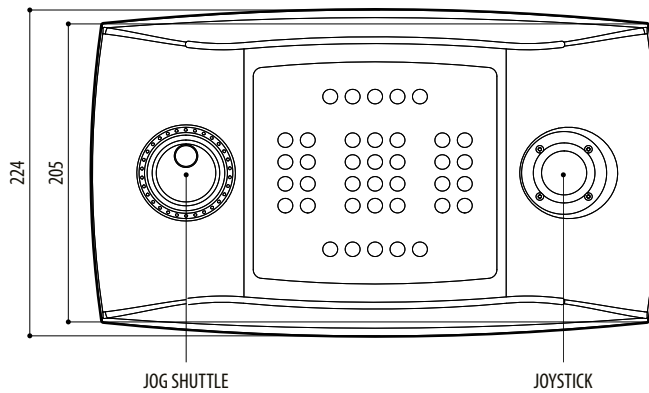

DCZ