

LogiLink®



PoE Injector, 30W IEEE802.3at

Art. No.: POE004

Up to 30W power/data connection to a Gigabit PoE device over standard Ethernet cable.

Features:

- » Network devices at Gigabit speeds all within a compact device
- » Automatically detects PoE terminals and supplies inline power
- » Port count: one 10/100/1000BASE-T data and one 10/100/1000BASE-T PoE (data + power combined channel)
- » Overload and short-circuit protection
- » Auto-sensing power drawn from 802.3af/at power source equipment to PD devices
- » Supplies power up to 25,5W (Max. 30W)

Specification:

Solution	PD69101
Interface	One connector (Data port) for connecting to the passive hub or switch One connector (Data & power port) for connecting to the PoE PD
Standard	IEEE802.3 10BASE-T IEEE802.3u 100BASE-TX IEEE802.3ab 1000BASE-T IEEE802.3af/at
LED Definition	Power: Green LED (x1) • Light off: not connect PD or fail • Light on: connect PD AC: Green LED (x1) • Light off: power off or fail • Light on: power on
Input	100~240V AC, 50/60Hz
Output Voltage	53V
Dimensions	155 x 58 x 36mm
Casing	Plastic



POE004



Made in China



RoHS
compliant



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered namework of their respective owners.


LogiLink®



PoE Injector, 30W IEEE802.3at

Art. No.: POE004

Temperature	Operating: 0°C ~ 40°C Storage: -40°C ~ 70°C
Humidity	Operating: 10% ~ 90% RH, non-condensing Storage: 5%~90% RH, non-condensing

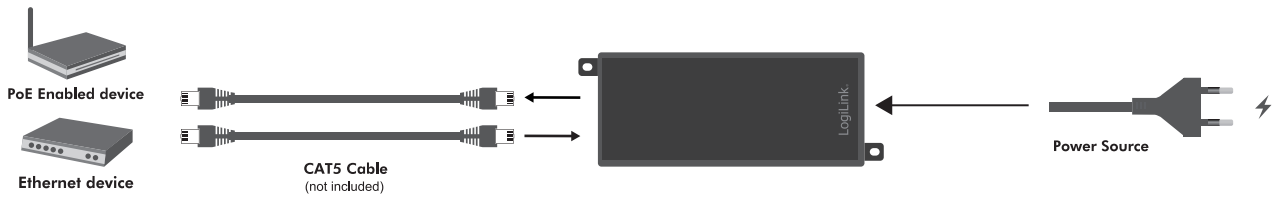

Package Contents:

- » 1 x PoE Injector
- » 1 x Power Cord
- » 1 x Screw Package
- » 1 x User Manual

Package Informations:

- » Packing Dimension: 180 x 140 x 70mm
- » Packing Weight: 0.48kg
- » Carton Dimension: 386 x 372 x 296mm
- » Carton Q'ty: 20pcs
- » Carton Weight: 10.34kg



POE004



Made in China



RoHS
compliant



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered namework of their respective owners.